
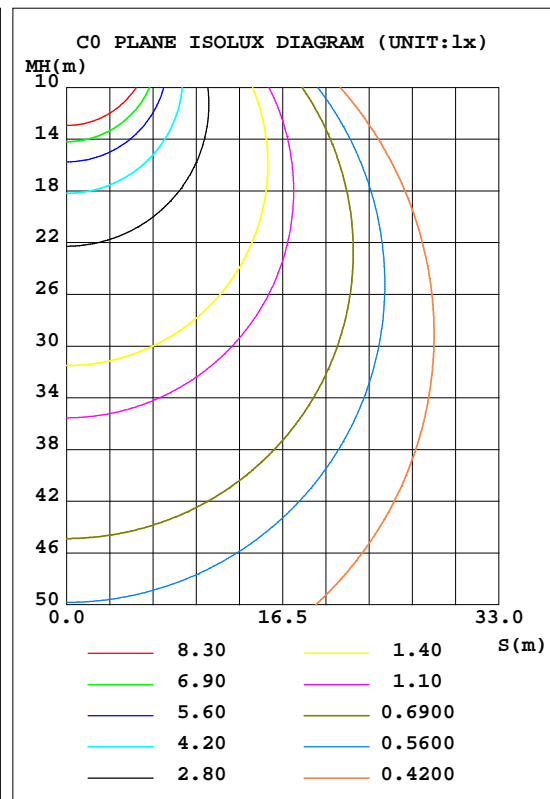


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 92.45 lm/W			
MODEL		I _{max} (cd)	1390	S/MH(C0/180)	1.27
NOMINAL POWER(W)	--	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	3911.6	η UP, DN(C0-180)	0.0,49.7
NOMINAL FLUX(lm)	3911.57	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,50.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.35

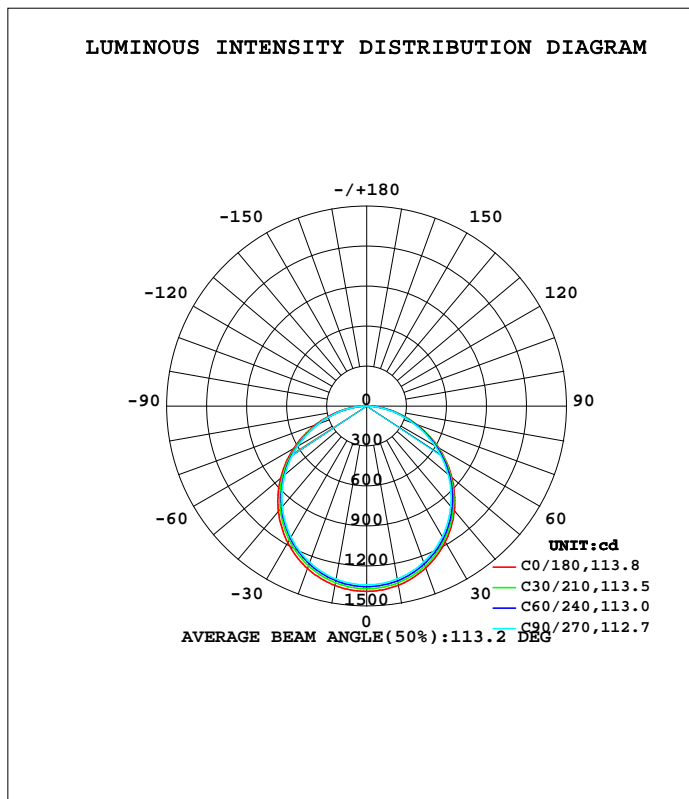

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1365	1339	1317	1301	1367	1337	1318	1305	0- 10	127.6	127.6	3.26,3.26
20	1294	1270	1247	1232	1298	1266	1249	1238	10- 20	365.7	493.3	12.6,12.6
30	1178	1158	1134	1120	1184	1152	1137	1130	20- 30	555.2	1049	26.8,26.8
40	1023	1006	982.2	970.5	1031	999.0	986.4	983.4	30- 40	671.0	1720	44,44
50	835.5	821.9	798.0	789.2	844.1	813.8	803.8	805.0	40- 50	697.9	2417	61.8,61.8
60	621.5	611.5	589.8	583.3	630.8	604.3	597.3	601.9	50- 60	632.8	3050	78,78
70	394.7	391.0	367.3	368.0	406.9	382.5	380.3	386.4	60- 70	487.6	3538	90.4,90.4
80	176.3	173.0	156.4	157.0	186.8	168.9	165.7	177.4	70- 80	289.4	3827	97.8,97.8
90	3.274	4.777	0.8812	1.541	4.893	3.197	2.517	6.622	80- 90	84.29	3912	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2070.9 lm

%lum = 52.9%
%lamp = 52.9%

Conical surface Flux(120deg): 3050.3 lm


%lum = 78.0%
%lamp = 78.0%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

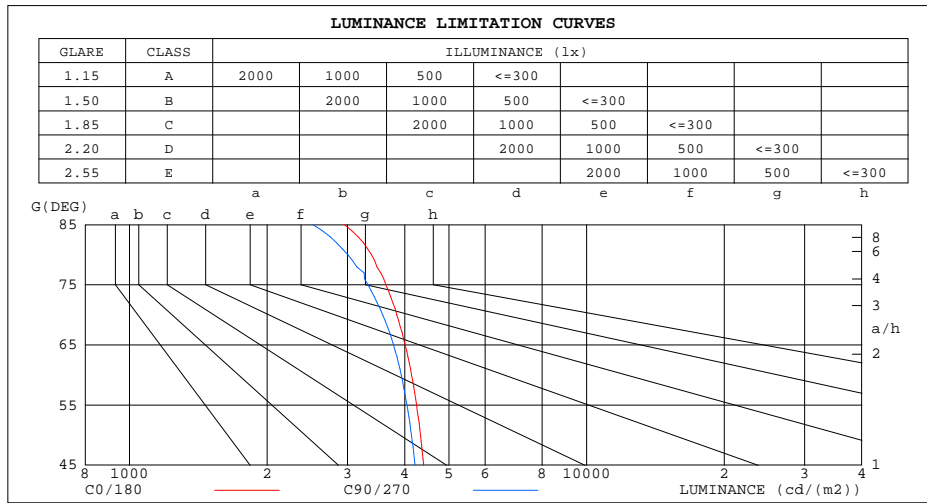

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2952	2521
80	3384	3003
75	3640	3325
70	3847	3580
65	4010	3783
60	4143	3932
55	4247	4046
50	4333	4138
45	4400	4213


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.90	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.52	.49
5.0	.62	.53	.47	.61	.53	.46	.59	.52	.46	.57	.50	.45	.55	.49	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.48	.41	.35	.47	.40	.35	.46	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.33	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

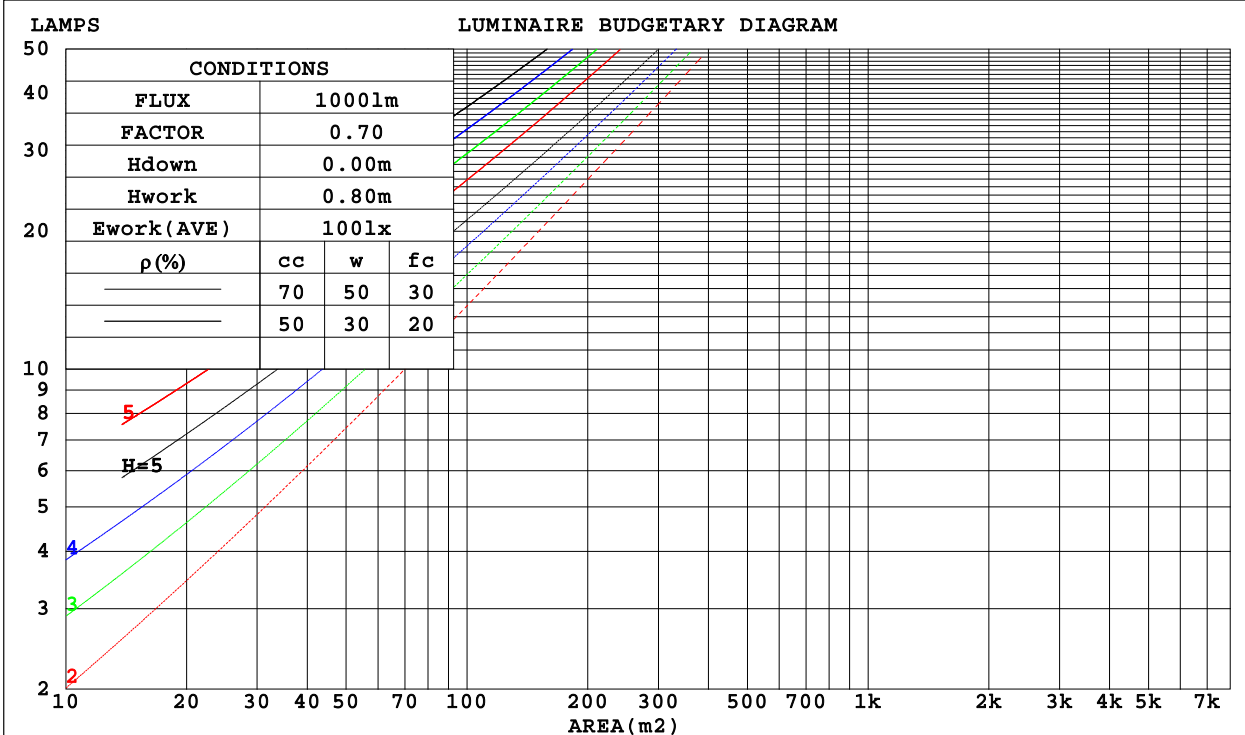

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.315	.179	.057	.308	.176	.056	.295	.169	.054	.283	.163	.052	.271	.157	.051	
2.0	.295	.162	.050	.289	.159	.049	.277	.154	.048	.267	.150	.047	.257	.145	.046	
3.0	.273	.145	.043	.267	.143	.043	.257	.139	.042	.247	.135	.042	.238	.132	.041	
4.0	.251	.131	.038	.246	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.191	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027	
8.0	.187	.091	.026	.183	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.156	.134	.155	.134	.115	.106	.092	.080	.061	.053	.046	.019	.017	.015	
2.0	.173	.132	.098	.148	.114	.084	.101	.079	.059	.058	.046	.034	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.026	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.010	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.129	.070	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm										
NAME: 600-600面板灯					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:555*555mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.0	19.5	18.2	19.7	19.9	17.8	19.3	18.0	19.5	19.7
3H	19.6	21.0	19.9	21.2	21.5	19.3	20.7	19.6	20.9	21.2
4H	20.2	21.6	20.5	21.8	22.1	19.9	21.2	20.2	21.5	21.8
6H	20.7	22.0	21.0	22.3	22.5	20.3	21.6	20.7	21.9	22.2
8H	20.9	22.1	21.2	22.4	22.7	20.5	21.7	20.8	22.0	22.3
12H	21.0	22.2	21.3	22.5	22.8	20.5	21.7	20.9	22.0	22.3
4H 2H	18.6	19.9	18.9	20.2	20.4	18.4	19.8	18.7	20.0	20.3
3H	20.4	21.5	20.7	21.8	22.1	20.1	21.3	20.5	21.6	21.9
4H	21.1	22.2	21.5	22.6	22.9	20.9	21.9	21.2	22.3	22.6
6H	21.8	22.7	22.2	23.1	23.5	21.4	22.4	21.8	22.7	23.1
8H	22.0	22.9	22.4	23.3	23.7	21.6	22.5	22.0	22.9	23.3
12H	22.2	23.0	22.6	23.4	23.8	21.8	22.6	22.2	23.0	23.4
8H 4H	21.4	22.3	21.8	22.7	23.1	21.2	22.1	21.6	22.4	22.8
6H	22.2	23.0	22.7	23.4	23.8	21.9	22.6	22.3	23.1	23.5
8H	22.5	23.2	23.0	23.6	24.1	22.2	22.8	22.6	23.3	23.7
12H	22.8	23.4	23.3	23.8	24.3	22.4	23.0	22.9	23.4	23.9
12H 4H	21.4	22.3	21.9	22.6	23.1	21.2	22.0	21.6	22.4	22.8
6H	22.3	22.9	22.7	23.4	23.8	22.0	22.6	22.4	23.1	23.5
8H	22.6	23.2	23.1	23.7	24.1	22.3	22.9	22.8	23.3	23.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 3912 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 4.7)
Area: 0.3 m2

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-05-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	47	40
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	99	91	85	96	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	90	86	78
4.00	106	100	95	104	98	94	99	95	91	82
5.00	108	104	99	106	102	98	101	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

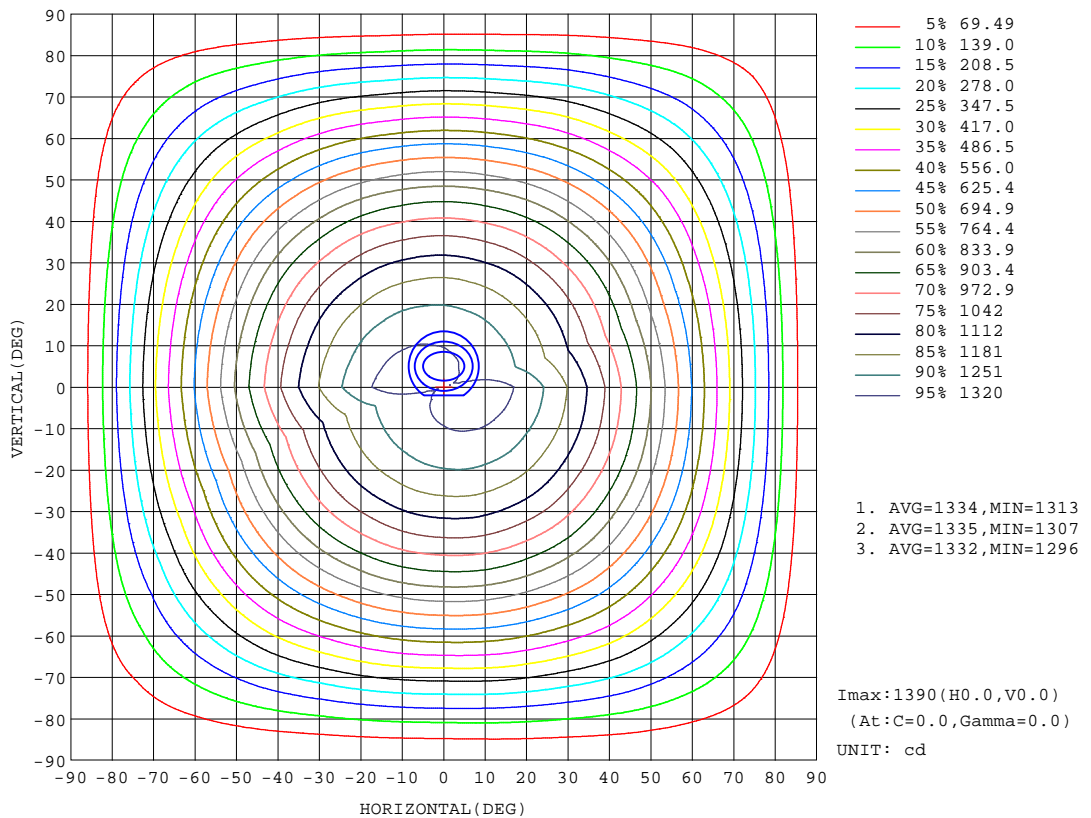


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

Flux out:2811 lm

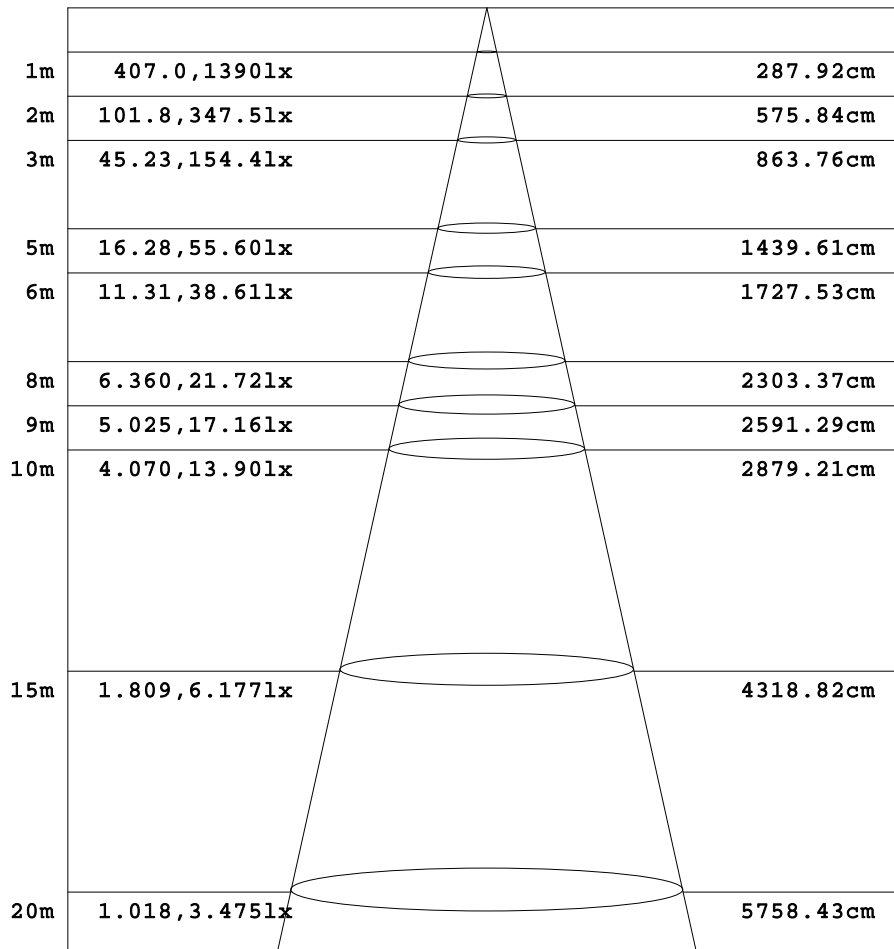

Height Eavg, Emax Angle:110.43deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

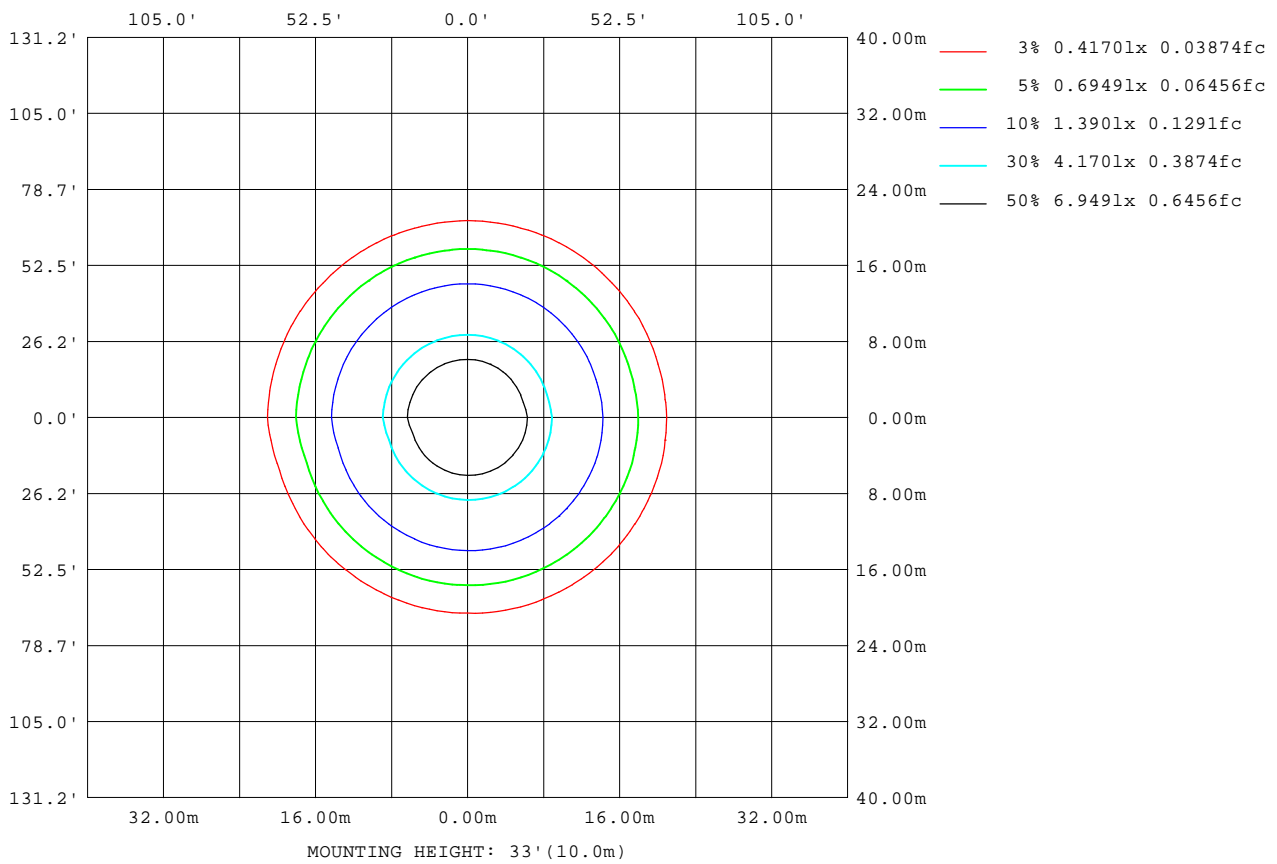

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

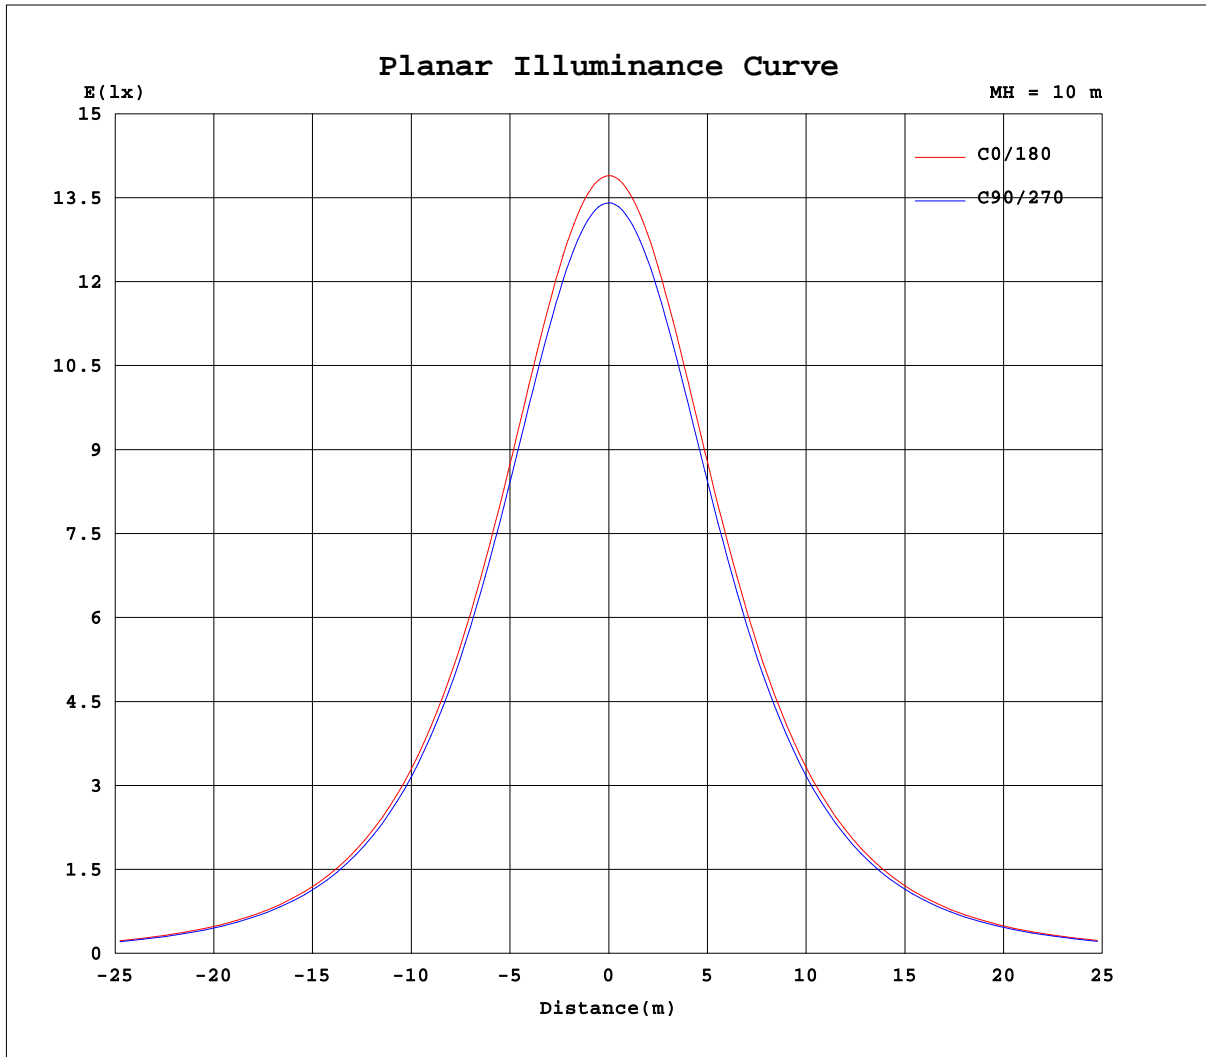

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1390	1379	1370	1362	1354	1347	1341	1336	1331	1326	1323	1320	1390	1379	1370	1362	1354	1347	1341
5	1383	1374	1364	1357	1349	1342	1335	1330	1324	1319	1316	1313	1384	1373	1364	1355	1348	1341	1336
10	1365	1356	1347	1339	1331	1325	1317	1312	1306	1301	1298	1295	1367	1355	1346	1337	1330	1323	1318
15	1335	1327	1318	1311	1302	1295	1288	1282	1276	1273	1269	1266	1338	1325	1317	1307	1300	1293	1289
20	1294	1286	1277	1270	1262	1255	1247	1242	1236	1232	1228	1226	1298	1284	1276	1266	1259	1252	1249
25	1242	1235	1226	1220	1211	1204	1196	1191	1184	1181	1178	1176	1246	1233	1224	1214	1208	1200	1198
30	1178	1173	1164	1158	1149	1143	1134	1129	1123	1120	1117	1116	1184	1171	1162	1152	1146	1138	1137
35	1106	1101	1092	1087	1077	1071	1062	1058	1052	1050	1047	1046	1112	1099	1091	1080	1074	1067	1066
40	1023	1020	1012	1006	997	991	982	978	972	971	967	967	1031	1018	1010	999	994	987	986
45	933	931	922	918	908	903	894	890	884	883	881	881	942	928	921	910	905	899	899
50	836	834	826	822	812	808	798	795	789	789	787	787	844	831	824	814	809	803	804
55	731	730	723	719	710	705	696	693	688	688	686	687	740	728	721	711	707	701	703
60	621	621	615	611	603	598	590	587	582	583	581	583	631	620	613	604	600	595	597
65	508	509	504	502	492	489	480	479	474	476	474	477	519	508	503	493	492	486	489
70	395	398	392	391	380	377	367	368	363	368	365	369	407	395	393	382	382	376	380
75	283	287	281	279	270	267	258	258	255	260	259	263	294	285	282	274	272	266	270
80	176	180	175	173	166	163	156	156	153	157	158	161	187	180	177	169	167	162	166
85	77.2	79.7	76.6	76.3	72.4	70.7	65.9	64.9	62.5	64.1	63.9	67.2	86.7	81.5	77.9	72.1	70.8	68.2	71.4
90	3.27	3.46	4.54	4.78	3.61	1.36	0.88	1.43	1.56	1.54	1.49	1.49	4.89	4.56	4.00	3.20	2.70	2.38	2.52

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.35V I:0.1904A P:42.33W PF:0.935 Freq:50.00Hz Lamp Flux:3911.57x1 lm		
NAME: 600-600面板灯	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:555*555mm	Shielding Angle:

Table--2

UNIT: cd

C(DEG) γ (DEG)	285	300	315	330	345																	
0	1336	1331	1326	1323	1320																	
5	1330	1326	1322	1318	1315																	
10	1313	1309	1305	1302	1299																	
15	1284	1281	1277	1275	1272																	
20	1244	1242	1238	1237	1234																	
25	1193	1192	1189	1188	1185																	
30	1133	1133	1130	1130	1127																	
35	1062	1063	1061	1062	1059																	
40	983	985	983	985	983																	
45	897	899	898	900	898																	
50	802	805	805	807	806																	
55	702	706	706	709	708																	
60	597	601	602	605	605																	
65	488	494	494	500	498																	
70	379	387	386	393	390																	
75	270	279	280	286	284																	
80	167	174	177	184	183																	
85	73.1	78.9	81.7	86.9	88.0																	
90	3.64	5.32	6.62	7.69	8.30																	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-05-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: